


"N" TYPE COAXIAL TERMINATIONS

PERFORMANCE SPECIFICATIONS:

PART NUMBER	CONNECTOR TYPE	VSWR (max.)
RFT25NFA	"N" FEMALE	DC to 4 GHz - 1.15:1
RFT25NMA	"N" MALE	4 to 8 GHz - 1.25:1
		8 to 12 GHz - 1.30:1
RFT25NFC	"N" FEMALE	DC to 8 GHz - 1.20:1
RFT25NMC	"N" MALE	DC to 8 GHz - 1.20:1
RFT25NFD	"N" FEMALE	DC to 4 GHz - 1.15:1
RFT25NMD	"N" MALE	DC to 4 GHz - 1.15:1
RFT25NFE	"N" FEMALE	DC to 2 GHz - 1.10:1
RFT25NME	"N" MALE	DC to 2 GHz - 1.10:1

25 WATTS (2KW peak)

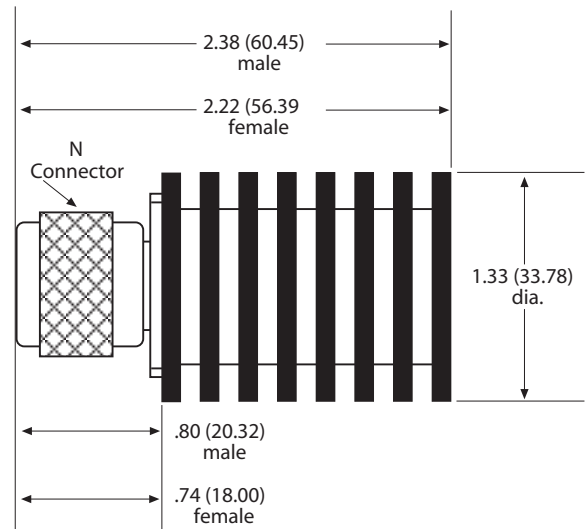

PERFORMANCE SPECIFICATIONS:

PART NUMBER	CONNECTOR TYPE	VSWR (max.)
RFT50NFC	"N" FEMALE	DC to 8 GHz - 1.20:1
RFT50NMC	"N" MALE	DC to 8 GHz - 1.20:1
RFT50NFD	"N" FEMALE	DC to 4 GHz - 1.15:1
RFT50NMD	"N" MALE	DC to 4 GHz - 1.15:1
RFT50NFE	"N" FEMALE	DC to 2 GHz - 1.10:1
RFT50NME	"N" MALE	DC to 2 GHz - 1.10:1

50 WATTS (3KW peak)

